

TENAX TRIPLET


Extruded net

PHYSICAL CHARACTERISTICS	TEST METHOD	UNIT	TRIPLET	NOTES
POLYMER TYPE			HDPE	
U.V. STABILIZER			YES	
MESH TYPE			THREE RIBS	
COLOUR			GREEN	
PACKAGING			IDENTIFICATION LABEL	

DIMENSIONAL CHARACTERISTICS	TEST METHOD	UNIT	TRIPLET	NOTES
MD PITCH		mm	13.5	
TD PITCH		mm	15.5	
UNIT WEIGHT		g/m ²	600.0	a
ROLLWIDTH		m	1.0	
ROLL LENGTH		m	25.0	
COVERED AREA		m ²	25.0	
ROLL DIAMETER		m	0.29	
ROLLVOLUME		m ³	0.09	
ROLLWEIGHT		kg	15.0	a

NOTES:

a) Tolerances \pm 5%

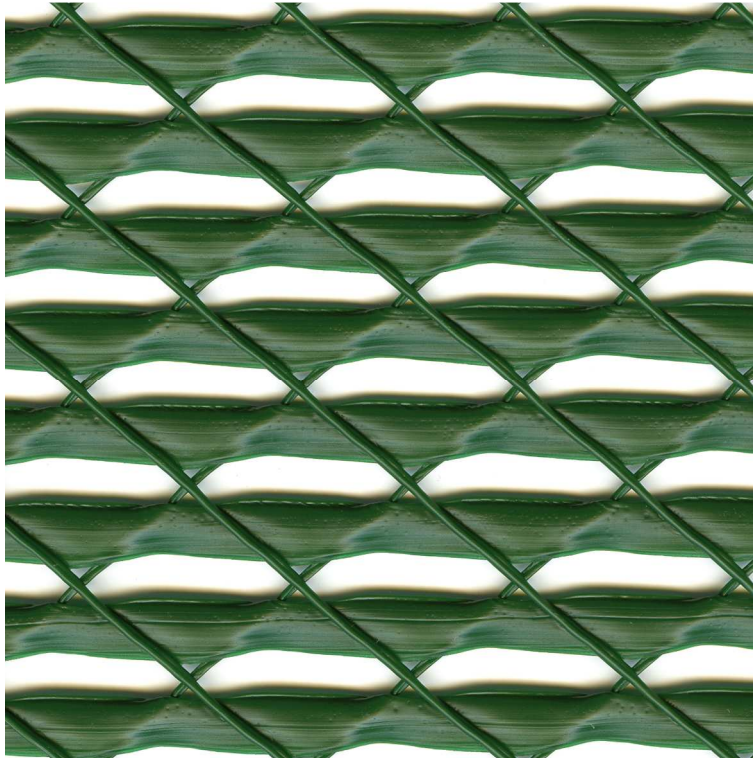

Just Indicating

The data contained in this publication are based on the knowledge available at the time of printing and may be subjected to amendments due to changes of the methods of testing and/or manufacturing. All dimensions and properties are reported as typical values. Tenax nets are thermoplastic products subjected to shrinkage. MD: longitudinal direction. TD: transversal direction. Tenax Spa Quality System has been assessed and registered in agreement with ISO 9001:2008 Standard.



SGS ITALY Certificate n° IT93/0008a
SGS U.K. Certificate n° IT93/2568.01



TENAX Spa Quality System has been assessed and registered in agreement with ISO:9001:2008 by SGS Italy and SGS UK.

The TENAX Laboratory has been operational since 1980 and has been continuously improved with the purpose of assuring unequalled technical development of the products and accurate Quality Control.

The TENAX Laboratory can perform mechanical, hydraulic and durability tests, according to the most important international standards like ISO, CEN, ASTM, DIN, BSI, UNI.



TENAX SpA
Via dell'Industria, 3
23897 Viganò (LC)
Tel. +39 039.9219300
Fax +39 039.9219290
customer.service@tenax.net